PROFILE ROLLER

Product Specifications

Rooftop Equipment Inc.

PRODUCT DETAILS

PRODUCT NAME: Profile Roller

ORDER QUANTITY: Each/Box of 9

INCLUDES: One roller

DESCRIPTION: Profile rollers are available in two sizes: 8” and 14” and fit on several frames. These rollers are contoured to fit the rib of a metal panel. Due to the vast numbers and variations of panels, care must be taken to choose the right one. We have eight profiles that we consider standard and keep in stock. With 4 key measurements, a custom roller can be made in two weeks to fit most any panel. (See back for measuring guide)

PRODUCT BENEFITS

- Accurately cover the contours of ribbed, metal roof panels
- Quickly coat metal roofs without messy overspray
- Dramatically improve your profit margin by eliminating wasted time and materials
- Compatible with 8” Hand Roller Frames, 14” Tank Spreader, and the 8” and 16” Control Flow Frame

PRODUCT SIZES

AG (HR-08-AG)

Batten (HR-08-BTN)

Hi-R (HR-08-HR)

R Profile (PBR) (HR-08-RP)

Single Lock (HR-08-SLK)

Snap Lock (HR-08-SNP)

TEE (HR-08-TEE)

Trapezoid (HR-08-TRP)

NEED TO PLACE AN ORDER OR GET REPLACEMENT PARTS?

Your success as a roofer depends on your ability to get jobs done quickly and efficiently. Because of that, we diligently work to make it as easy as possible to reorder a product, order compatible products, or get a replacement part so you can get to your next job faster.

TO ORDER ONLINE: go to rooftopequipment.com

TO ORDER OVER THE PHONE: call us during normal business hours at (724) 946-9999

TO ORDER OVER EMAIL: email us at info@rooftopequipment.com

TO FIND A DISTRIBUTOR NEAR YOU: go to rooftopequipment.com/find-a-distributor/

PROFILE ROLLERS

Instructions for proper measurement

Rooftop Equipment Inc.

Rooftopequipment.com • Sales: (724) 946-9999

! YOUR PROFILE ROLLER WILL NOT FIT CORRECTLY IF YOU DO NOT FOLLOW THESE STEP-BY-STEP INSTRUCTIONS. YOUR APPLICATION WILL FAIL IF MEASURED IMPROPERLY. !

BRING THIS MEASURING GUIDE WITH YOU ON YOUR SITE VISITS WHEN PLANNING AND QUOTING A NEW JOB. HAVING THESE EXACT MEASUREMENTS IS ESSENTIAL WHEN ORDERING A CUSTOM OR STANDARD PROFILE ROLLER.

WATCH

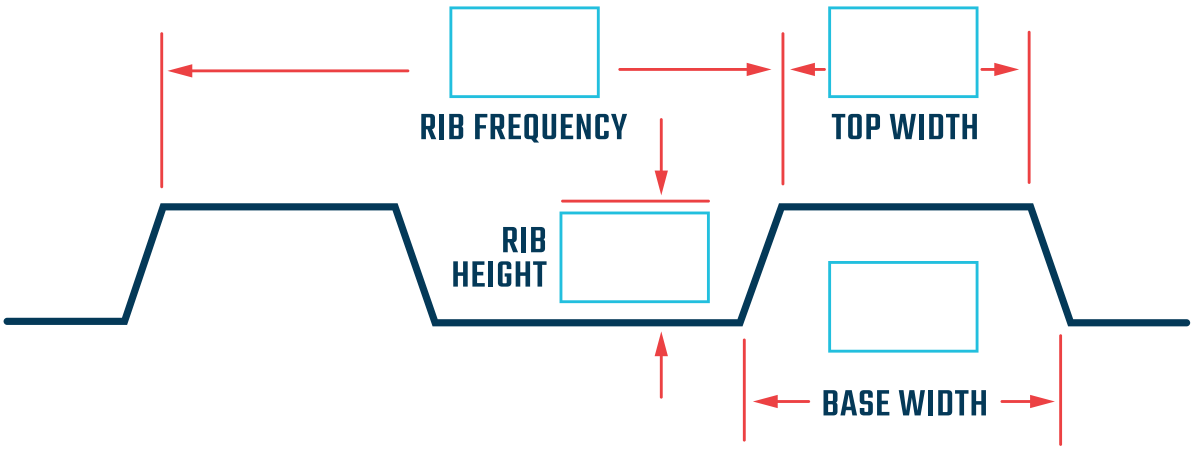

WRITE YOUR EXACT MEASUREMENTS WITHIN THE LIGHT-BLUE RECTANGLES SEEN IN THE MEASURING DIAGRAM. THESE MEASUREMENTS ARE CRUCIAL AND NEED TO BE EXACT.

WRITTEN INSTRUCTIONS:

STEP 1

Select a rib that is representative of all the ribs, or average multiple ribs. Measure and record the four key elements:

- **Rib Height:** Vertical height of the rib
- **Top Width:** Width of the top of the rib
- **Base Width:** Width of the base of the rib, usually best measured at the gutter
- **Rib Frequency:** Distance from a point on one rib to the same point on the next

STEP 2

Compare measurements with the standard profile measurements listed on this sheet. If unable to find a match, proceed to step 3.

- While the standard rollers will fit most roof contours, some roofs will require special attention. Rooftop can build a custom roller for use on a non-standard roof configuration with a two-week lead time following submittal and approval of measurements.

STEP 3

Email your four key measurements to info@rooftopequipment.com. (You may be asked to provide a tracing of the rib which can be taken at the end of a roof panel). Upon receipt of your request, someone from Rooftop Equipment will contact you to discuss your roller needs.